


Up To 3X Brighter

Use For:

- Laser Docking System for freight terminal docks
- Pathway Laser Systems for Warehouses, Walkways and Aisles
- Overhead Crane Exclusion Zones
- Bright, Long Distance Laser Lines

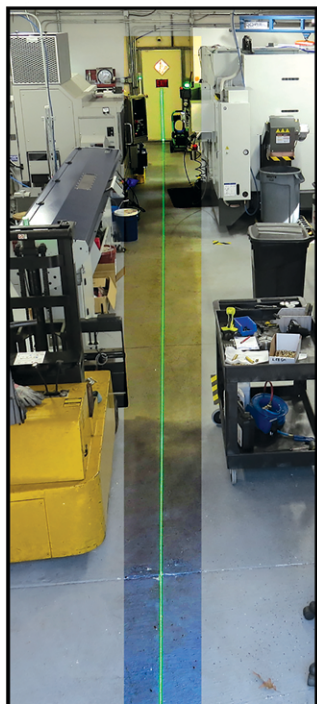

Includes Mounting
Bracket and
Cooling Fan

Green Laser Line with
90° Line Generator

Powers to choose from:

1W Laser Line for
bright laser line in all
conditions.

500mW Laser Line for
Class IIIa power limits.

Specifications

Model GLX60AC-1W

Class IIb < 500mW @ 520nm.
Operates on 110VAC 50/60HZ. 90° Divergent, Even Intensity,
Line Generator Lens included.

Model GLX60DC-1W

Class IIb < 500mW @ 520nm. Operates on 12-24VDC @ 2A.
Dimensions: 4" (101mm) x 5" (127mm) x 2 1/2" (63mm)
Weight: 10oz (311gms)

Model GLX60AC-500mW

Class IIIa, < 5mW @ 520nm. Operates on 110VAC 50/60HZ.
90° Divergent, Even Intensity, Line Generator Lens included.

Model GLX60DC-500mW

Class IIIa < 5mW @ 520nm. Operates on 12-24VDC @ 2A.



Shown with HB59 Steel Enclosure

**100-foot Laser Line – 3X Brighter for
Daylight Laser Docking and Pathways.**

**200-foot Pathway Laser Light – Fewer Laser
Modules required to cover the distance.**

ORDER NOW!
(800) 598-5973



Manufactured by Laser Tools Co., Inc.,
12101 Arch St., Little Rock, AR 72206
Tel: 501-562-0900 | FAX 501-562-0022
www.LaserToolsCo.com | info@lasertoolscos.com
Copyright March 2024

DANGER
Class IIb
Avoid Direct
Exposure
To Beam
LASER RADIATION
Avoid direct eye exposure
Maximum Output Power
<500mW @ 670-632nm
Class IIb Laser Product